


Derivador 4D F / Derivador 4D F / Dérivateur 4D F / 4W Tap F / 4-fach SAT-Verteiler 5-2400MHz-DC-Pass in beiden Richtungen

Ref. 514110, 514210, 514310, 514410, 514510

Art. Nr. AZS412DCFN, AZS416DCFN, AZS419DCFN, AZS424DCFN, AZS428DCFN


514110 (AZS412DCFN)

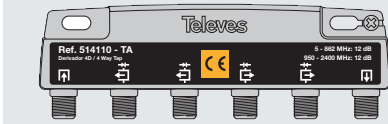

514210 (AZS416DCFN)




514310 (AZS419DCFN)

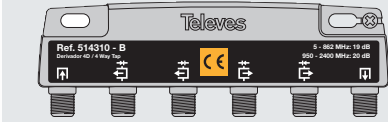

514410 (AZS424DCFN)



514510 (AZS428DCFN)

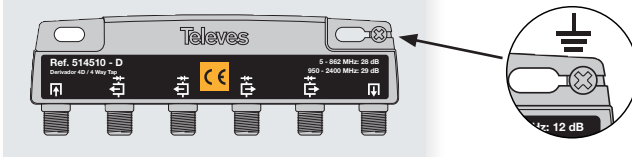

Caract. techniq.	Especif. técnicas	Tech. Daten	Especif. técnicas	Technical specific.		514110 AZS412DCFN	514210 AZS416DCFN	514310 AZS419DCFN	514410 AZS424DCFN	514510 AZS428DCFN
Bande passante	Margem frequência	Frequenzbereich	Margen frecuencia	Frequency range	MHz	5 ... 2400				
Type	Tipo	Typ	Tipo	Type		TA	A	B	C	D
Pertes dérivation	Perdas derivação	Abzweig-dämpfung	Pérdidas derivación	Tap loss	MATV	12	16	19	24	28
						IF	12	16	20	24
Pertes passage	Perdas passagem	Durchgangs-dämpfung	Pérdidas paso	Loss IN-OUT	MATV	4,5	2,3	1,5	1	1
						IF	5	3,4	2,5	2
Découplage	Desacopl.	Entkopplung Abzweig-ausgänge-Ausgang	Desacoplo	Out-Tap isolation loss	MATV	> 20				
						IF	> 20			
Réjéct entre dérivation	Rejeição entre derivação	Entkopplung Abzweig-ausgänge	Rechazo entre derivaciones	Rejection between taps	MATV	> 20				
Courant max.	Corrente máxima	Max. Strom	Corriente máxima	Max. current	IN<->OUT TAPS->IN/OUT	A				

