



24-port Gigabit Web Smart Switch with Mini-GBIC slots

TEG-240WS (C1.0)

TEG-240WS 24-Port 10/100/1000Mbps Web-Based Smart Switch is the ideal Switch for network segmenting. TEG-240WS supports web browser configuration; Network Administrator can use web browser to configure port speed, VLAN and QoS, and also monitor each port's status which provides simple migration, scalability, and flexibility to handle new applications and data types. TEG-240WS is powerful and easy-to-use in reducing unnecessary broadcast traffic and enhance network security.

FEATURES

- 24 x 10/100/1000Mbps Auto-Negotiation and Auto-MDIX Gigabit Ports
- 2 x 1000Base-SX/LX Mini-GBIC Slots (share with Port 23~24)
- Full Wire-Speed Non-Blocking Reception and Transmission
- Store and Forward Switching Method
- Extensive Diagnostic LED's on the Front Panel
- IEEE 802.3x Flow Control for Full/Half-Duplex Mode; Back Pressure Flow Control for Half-Duplex Mode
- Supports 802.1Q VLAN, IGMP Snooping and 802.1p Priority Queues
- Supports Trunking (max 6 groups, 8 ports per group) and Port Mirroring
- Supports Jumbo Frame Packets Transfer (Max Size up to 10240bytes)
- Integrated Address Look-Up Engine, Supports 8K Absolute MAC addresses
- Supports 512Kbytes RMA for Data Buffering
- Port Setting Function, Users can set each Port's Availability, Speed, Duplex Mode, and Flow Control
- Easy Configuration via Web browser
- Standard 19" (1U) Rack Mount Size
- 5-Year Warranty


24-port Gigabit Web Smart Switch with Mini-GBIC slots

TEG-240WS (C1.0)

SPECIFICATIONS

Hardware	
Standards	<ul style="list-style-type: none"> • IEEE 802.3 10Base-T ; IEEE 802.3u 100Base-TX • IEEE 802.3ab 1000Base-T ; IEEE 802.3z 1000Base-SX/LX (Mini-GBIC) • IEEE 802.3x Full Duplex Flow Control
Network Media	<ul style="list-style-type: none"> • Ethernet: 2-pair UTP Cat. 3, 4, 5, up to 10Mbps • Fast Ethernet: 2-pair UTP Cat. 5, up to 100Mbps • Gigabit: 4-pair UTP Cat. 5, 5E, 6, up to 1000Mbps
Protocol	<ul style="list-style-type: none"> • CSMA/CD
Transmission Method	<ul style="list-style-type: none"> • Store-and-Forward
Interface	<ul style="list-style-type: none"> • 24 10/100/1000Mbps Auto-MDIX RJ45 Ports • 2 1000Base-SX/LX Mini-GBIC Slots (share with Gigabit Ports 23 and 24)
Data RAM Buffers	<ul style="list-style-type: none"> • 512KBytes per device
Filtering Address Table	<ul style="list-style-type: none"> • 8K entries per device
Data Transfer Rate	<ul style="list-style-type: none"> • 10Mbps: 10/20Mbps (Half/Full Duplex) • 100Mbps: 100/200Mbps (Half/Full Duplex) • 1000Mbps: 2000Mbps (Full Duplex)
Switch Fabric	<ul style="list-style-type: none"> • 48Gbps Forwarding Capacity
Diagnostic LEDs	<ul style="list-style-type: none"> • Per Unit: Power, System • Per Copper Gigabit Port: Link/ACT, 1000M, 100M • Per Mini-GBIC Port: Link/ACT, 1000M
Power Supply	<ul style="list-style-type: none"> • 100 ~ 240VAC 50/60Hz, Internal Universal Switching Power
Power Consumption	<ul style="list-style-type: none"> • 35 Watts (Max)
Dimensions (WxHxD)	<ul style="list-style-type: none"> • 440mm x 210mm x 44mm (17.3 x 8.3 x 1.73 inches)
Weight	<ul style="list-style-type: none"> • 3 Kg (6.6 lb)
Temperature	<ul style="list-style-type: none"> • Operating: 0° ~ 40° C (32° ~ 104° F) Storage: -10° ~ 70° C (14° ~ 158° F)
Humidity	<ul style="list-style-type: none"> • Operating: 10 % ~ 90 % (non-condensing); Storage: 5 % ~ 90 % (non-condensing)
Certifications	<ul style="list-style-type: none"> • CE, FCC

NETWORKING SOLUTIONS

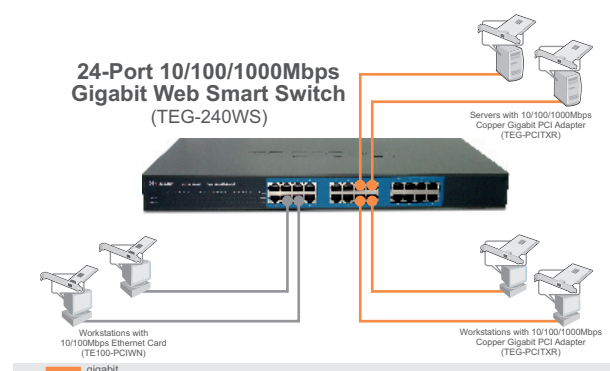

PACKAGE CONTENTS

- TEG-240WS
- Multi-Language QIG
- CD-ROM (Utility/UG)
- Power Cord
- Rack Mount Kit

RELATED PRODUCTS

TEG-PCBUSR	Gigabit PC Card
TEG-PCITXR	Gigabit PCI Adapter
TEG-160WS	16-port Gigabit Web Smart Switch

ORDERING INFORMATION

TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA
 Tel: 1-310-961-5500
 Fax: 1-310-961-5511
 Web: www.trendnet.com
 Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

