

CentreCOM[®] GS900MX/MPX Series

Layer 3 Managed Gigabit Ethernet Stackable Switches

Allied Telesis CentreCOM GS900MX/MPX Series switches are cost-effective, fully managed, and stackable. The switches in this series can serve as an AMF node when an AMF Master switch is available in the network, which helps to reduce network running costs by automating and simplifying many day-to-day tasks.



Overview

With a choice of 24- and 48-port 10/100/100T versions with 10G up link, Power over Ethernet (PoE), plus the ability to stack up to four units, the CentreCOM GS900MX/ GS900MPX Series switches are ideal for demanding applications at the edge of the network.

Key Features

- ▶ Allied Telesis Management Framework™ (AMF) edge node
- ▶ AlliedWare Plus operating system
- ▶ Eco-friendly
- ▶ Mixed stacking up to four units
- ▶ IPv6 features
- ▶ IEEE 802.1x/MAC/Web authentication support
- ▶ Graphical User Interface (GUI) for easy management
- ▶ Basic L3 features supported
 - ▶ Static routing
 - ▶ RIP
- ▶ DHCP relay
- ▶ L2 Multicast 512 entries
- ▶ IPv4 ACL 256 entries

Specifications

Performance

- ▶ 40Gbps of stacking bandwidth
- ▶ Supports 9216bytes jumbo frames
- ▶ Wirespeed multicasting
- ▶ Up to 16K MAC addresses

- ▶ 512MB DDR SDRAM
- ▶ 64MB flash memory

Power Characteristics

AT-GS924MX and AT-GS948MX
AC model: 100-240 VAC, 1.0A maximum, 50/60 Hz
AT-GS924MPX and AT-GS948MPX
AC model: 100-240 VAC, 5.0A maximum, 50/60 Hz

Expandability

- ▶ Hardware Virtual Chassis Stacking (VCStack™) up to four units

Flexibility and Compatibility

- ▶ Port speed and duplex configuration can be set manually or by auto-negotiation diagnostic tools
- ▶ Automatic link flap detection and port shutdown
- ▶ Optical Digital Diagnostics Monitoring (DDM)
- ▶ Ping polling and TraceRoute for IPv4 and IPv6 Port mirroring

IP Features

- ▶ IPv4 static routing and RIP
- ▶ Device management over IPv6 networks with SNMPv6, Telnetv6, SSHv6
- ▶ NTPv6 client

Management

- ▶ Front panel 7-segment LED provides at-a-glance status and fault information
- ▶ Allied Telesis Management Framework™ (AMF) enables powerful centralized management and zero-touch device installation and recovery
- ▶ Console management port on the front panel for ease of access
- ▶ Eco-friendly mode allows ports and LEDs to be disabled to save power
- ▶ Industry-standard CLI with context-sensitive help
- ▶ Powerful CLI scripting engine
- ▶ Comprehensive SNMP MIB support for standards-based device management
- ▶ Built-in text editor
- ▶ Event-based triggers allow user-defined scripts to be executed upon selected system events
- ▶ USB interface allows software release files, configurations, and other files to be stored for backup and distribution to other devices

Quality of Service (QoS)

- ▶ Eight priority queues with a hierarchy of high-priority queues for real-time traffic, and mixed scheduling, for each switch port

- ▶ Limit bandwidth per port or per traffic class down to 64kbps
- ▶ Wirespeed traffic classification with low latency essential for VoIP and real-time streaming media applications
- ▶ Policy-based QoS based on VLAN, port, MAC and general packet classifiers
- ▶ Policy-based storm protection
- ▶ Extensive remarking capabilities
- ▶ Taildrop for queue congestion control
- ▶ Strict priority, weighted round robin or mixed scheduling
- ▶ IP precedence and DiffServ marking based on Layer 2, 3 and 4 headers

Resiliency Features

- ▶ Control Plane Prioritization (CPP) ensures the CPU always has sufficient bandwidth to process network control traffic
- ▶ Dynamic link failover (host attach)
- ▶ EPSRing™ (Ethernet Protection Switched Rings) with enhanced recovery
- ▶ Loop protection: loop detection and thrash limiting
- ▶ PVST+ compatibility mode
- ▶ STP root guard
- ▶ UniDirectional Link Detection (UDLD)

Security Features

- ▶ Access Control Lists (ACLs) based on Layer 2, 3 and 4 headers
- ▶ Configurable auth-fail and guest VLANs
- ▶ Authentication, Authorization, and Accounting (AAA)
- ▶ Bootloader can be password protected for device security
- ▶ BPDU protection
- ▶ DHCP snooping, IP source guard and Dynamic ARP Inspection (DAI)
- ▶ Dynamic VLAN assignment
- ▶ Network Access and Control (NAC) features manage endpoint security
- ▶ Port-based learn limits (intrusion detection)
- ▶ Private VLANs provide security and port isolation for multiple customers using the same VLAN
- ▶ Secure Copy (SCP)
- ▶ Strong password security and encryption
- ▶ Tri-authentication: MAC-based, Web-based and IEEE 802.1x

CentreCOM GS900MX/MPX Series | Layer 3 Managed Gigabit Ethernet Stackable Switches

Specifications

PRODUCT	10/100/1000T (RJ-45) COPPER PORTS	COMBO (100/1000X SFP PORTS OR 10/100/1000T, RJ-45 PORTS)	10 GIGABIT SFP+ PORTS OR 10 GIGABIT STACKING PORTS	MAX POE+ ENABLED PORTS	SWITCHING FABRIC	FORWARDING RATE
AT-GS924MX	24	2	2		92Gbps	68.44Mpps
AT-GS924MPX	24	2	2	24	92Gbps	68.44Mpps
AT-GS948MX	48	2	2		140Gbps	104.16Mpps
AT-GS948MPX	48	2	2	48	140Gbps	104.16Mpps

Physical Specifications

PRODUCT	WIDTH	DEPTH	HEIGHT	WEIGHT
AT-GS924MX	339 mm (13.4 in)	211 mm (8.3 in)	44 mm (1.72 in)	2.5 Kg (5.5 lb)
AT-GS924MPX	441 mm (17.3 in)	356 mm (14 in)	44 mm (1.72 in)	5.3 Kg (11.6 lb)
AT-GS948MX	441 mm (17.3 in)	356 mm (14 in)	44 mm (1.72 in)	4.5 Kg (9.9 lb)
AT-GS948MPX	441 mm (17.3 in)	356 mm (14 in)	44 mm (1.72 in)	5.8 Kg (12.8 lb)

Power and Noise Characteristics

PRODUCT	NO POE LOAD				FULL POE+ LOAD				
	MAX POWER CONSUMPTION	MAX HEAT DISSIPATION	TYPICAL NOISE	MAX NOISE	TYPICAL POWER CONSUMPTION	MAX POWER CONSUMPTION	MAX SYSTEM HEAT DISSIPATION	TYPICAL NOISE	MAX NOISE
AT-GS924MX	30.7W	104.6 BTU/hr	27.1 dB	52.7 dB					
AT-GS924MPX	53.6W	182.9 BTU/hr			464.3W	94.3W	321.7 BTU/hr	43.7 dB	57.7 dB
AT-GS948MX	50.7W	173.1 BTU/hr	33.8 dB	58.1 dB					
AT-GS948MPX	70.2W	239.5 BTU/hr			480.6W	110.6W	377.4 BTU/hr	42.0 dB	58.4 dB

PRODUCT	MAX POE POWER	MAX POE PORTS AT 7.5W PER PORT	MAX POE PORTS AT 15W PER PORT	MAX POE PORTS AT 30W PER PORT
AT-GS924MPX	370W	24	24	12
AT-GS948MPX	370W	48	24	12

Cryptographic Algorithms

FIPS Approved Algorithms

Encryption (Block Ciphers):

- ▶ AES (ECB, CBC, CFB and OFB Modes)
- ▶ 3DES (ECB, CBC, CFB and OFB Modes)

Block Cipher Modes:

- ▶ CCM
- ▶ CMAC
- ▶ GCM
- ▶ XTS

Digital Signatures & Asymmetric Key Generation:

- ▶ DSA
- ▶ ECDSA
- ▶ RSA

Secure Hashing:

- ▶ SHA-1
- ▶ SHA-2 (SHA-224, SHA-256, SHA-384, SHA-512)

Message Authentication:

- ▶ HMAC (SHA-1, SHA-2(224, 256, 384, 512)

Random Number Generation:

- ▶ DRBG (Hash, HMAC and Counter)

Non FIPS Approved Algorithms

RNG (AES128/192/256)

DES

MD5

Ethernet

IEEE 802.1AX Link aggregation (static and LACP)

IEEE 802.2 Logical Link Control (LLC)

IEEE 802.3 Ethernet

IEEE 802.3ab1000T

IEEE 802.3ae10 Gigabit Ethernet

IEEE 802.3ad Static and dynamic link aggregation

IEEE 802.3af Power over Ethernet (PoE)

IEEE 802.3at Power over Ethernet plus (PoE+)

IEEE 802.3az Energy Efficient Ethernet (EEE)

IEEE 802.3u 100X

IEEE 802.3x Flow control - full-duplex operation

IEEE 802.3z 1000X

IPv4 Features

RFC 791 Internet Protocol (IP)

RFC 792 Internet Control Message Protocol (ICMP)

RFC 826 Address Resolution Protocol (ARP)

RFC 894 Standard for the transmission of IP datagrams over Ethernet networks

RFC 919 Broadcasting Internet datagrams

RFC 922 Broadcasting Internet datagrams in the presence of subnets

RFC 932 Subnetwork addressing scheme

RFC 950 Internet standard subnetting procedure

RFC 1042 Standard for the transmission of IP datagrams over IEEE 802 networks

RFC 1071 Computing the Internet checksum

RFC 1122 Internet host requirements

RFC 1256 ICMP router discovery messages

RFC 1518 An architecture for IP address allocation with CIDR

RFC 1519 Classless Inter-Domain Routing (CIDR)

RFC 1918 IP addressing

IPv6 Features

RFC 2460 IPv6 specification

RFC 2464 Transmission of IPv6 packets over Ethernet networks

RFC 3484 Default address selection for IPv6

RFC 3596 DNS extensions to support IPv6

RFC 4007 IPv6 scoped address architecture

RFC 4193 Unique local IPv6 unicast addresses

RFC 4291 IPv6 addressing architecture

RFC 4861 Neighbor discovery for IPv6

RFC 4862 IPv6 Stateless Address Auto-Configuration (SLAAC)

RFC 5014 IPv6 socket API for source address selection

RFC 5095 Deprecation of type 0 routing headers in IPv6

Management

AMF MIB and SNMP traps

AT Enterprise MIB

SNMPv1, v2c and v3

IEEE 802.1AB Link Layer Discovery Protocol (LLDP)

RFC 1155 Structure and identification of management information for TCP/IP-based Internets

RFC 1157 Simple Network Management Protocol (SNMP)

RFC 1212 Concise MIB definitions

RFC 1213 MIB for network management of TCP/IP-based Internets: MIB-II

RFC 1215 Convention for defining traps for use with the SNMP

RFC 1227 SNMP MUX protocol and MIB

RFC 1239 Standard MIB

ORFC 2096 IP forwarding table MIB

RFC 2578 Structure of Management Information v2 (SMIPv2)

RFC 2579 Textual conventions for SMIPv2

CentreCOM GS900MX/MPX Series | Layer 3 Managed Gigabit Ethernet Stackable Switches

- RFC 2580 Conformance statements for SMIv2
- RFC 2674 Definitions of managed objects for bridges with traffic classes, multicast filtering and VLAN extensions
- RFC 2741 Agent extensibility (AgentX) protocol
- RFC 2819 RMON MIB (groups 1,2,3 and 9)
- RFC 2863 Interfaces group MIB
- RFC 3164 Syslog protocol
- RFC 3411 An architecture for describing SNMP management frameworks
- RFC 3412 Message processing and dispatching for the SNMP
- RFC 3413 SNMP applications
- RFC 3414 User-based Security Model (USM) for SNMPv3
- RFC 3415 View-based Access Control Model (VACM) for SNMP
- RFC 3416 Version 2 of the protocol operations for the SNMP
- RFC 3417 Transport mappings for the SNMP
- RFC 3418 MIB for SNMP
- RFC 3621 Power over Ethernet (PoE) MIB
- RFC 3635 Definitions of managed objects for the Ethernet-like interface types
- RFC 3636 IEEE 802.3 MAU MIB
- RFC 4022 SNMPv2 MIB for TCP using SMIv2
- RFC 4113 SNMPv2 MIB for UDP using SMIv2
- RFC 4293 SNMPv2 MIB for IP using SMIv2
- RFC 4188 Definitions of managed objects for bridges
- RFC 4318 Definitions of managed objects for bridges with RSTP
- RFC 4560 Definitions of managed objects for remote ping, traceroute and lookup operations

Multicast Support

- IGMP snooping (v1, v2 and v3)
- IGMP snooping fast-leave
- MLD snooping (v1 and v2)

Quality of Service (QoS)

- IEEE 802.1p Priority tagging
- RFC 2211 Specification of the controlled-load network element service
- RFC 2474 DiffServ precedence for eight queues/port
- RFC 2475 DiffServ architecture
- RFC 2597 DiffServ Assured Forwarding (AF)
- RFC 2697 A single-rate three-color marker
- RFC 2698 A two-rate three-color marker
- RFC 3246 DiffServ Expedited Forwarding (EF)

Resiliency Features

- IEEE 802.1D MAC bridges
- IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)
- IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)

Routing Information Protocol (RIP)

- RFC 1058 Routing Information Protocol (RIP)
- RFC 2082 RIP-2 MD5 authentication
- RFC 2453 RIPv2

Security Features

- SSH remote login
- SSLv2
- TACACS+ accounting and authentication
- IEEE 802.1X authentication protocols (TLS, TTLS, PEAP and MD5)
- IEEE 802.1X multi-suplicant authentication
- IEEE 802.1X port-based network access control
- RFC 2246 TLS protocol v1.0
- RFC 2865 RADIUS
- RFC 2866 RADIUS accounting
- RFC 2868 RADIUS attributes for tunnel protocol support
- RFC 3546 Transport Layer Security (TLS) extensions
- RFC 3579 RADIUS support for Extensible Authentication Protocol (EAP)
- RFC 3580 IEEE 802.1x RADIUS usage guidelines
- RFC 3748 PPP Extensible Authentication Protocol (EAP)
- RFC 4251 Secure Shell (SSHv2) protocol architecture
- RFC 4252 Secure Shell (SSHv2) authentication protocol
- RFC 4253 Secure Shell (SSHv2) transport layer protocol
- RFC 4254 Secure Shell (SSHv2) connection protocol

Services

- RFC 854 Telnet protocol specification
- RFC 855 Telnet option specifications
- RFC 857 Telnet echo option
- RFC 858 Telnet suppress go ahead option
- RFC 1091 Telnet terminal-type option
- RFC 1350 Trivial File Transfer Protocol (TFTP)
- RFC 1985 SMTP service extension
- RFC 2049 MIME
- RFC 2131 DHCP
- RFC 2132 DHCP options and BootP vendor extensions
- RFC 2554 SMTP service extension for authentication
- RFC 2616 Hypertext Transfer Protocol - HTTP/1.1
- RFC 2821 Simple Mail Transfer Protocol (SMTP)
- RFC 2822 Internet message format
- RFC 4330 Simple Network Time Protocol (SNTP) version 4
- RFC 5905 Network Time Protocol (NTP) version 4

VLAN support

- IEEE 802.1Q Virtual LAN (VLAN) bridges
- IEEE 802.1v VLAN classification by protocol and port
- IEEE 802.3ac VLAN tagging

Voice over IP (VoIP)


- LLDP-MED ANSI/TIA-1057
- Voice VLAN

Environmental Specifications

- Operating ambient temp. 0°C to 50°C (32°F to 113°F)
- Storage temp. -25°C to 70°C (-13°F to 158°F)
- Operating humidity 5% to 90% non-condensing
- Storage humidity 5% to 95% non-condensing
- Maximum Operating Altitude
 - AT-GS924MX: 2,000 m (6,562 ft)
 - AT-GS924MPX: 3,000 m (9,842 ft)
 - AT-GS948MX: 2,000 m (6,562 ft)
 - AT-GS948MPX: 3,000 m (9,842 ft)
- Maximum Non operating Altitude 4,000 m (13,100 ft)

Safety and Electromagnetic Emissions

- EMI (Emissions) : FCC Class A, EN55022 Class A, EN61000-3-2, EN61000-3-3, VCCI Class A, CISPR Class A, RCM, CE
- EMC (Immunity) : EN55024
- Electrical and Laser Safety : EN60950-1 (TUV), UL 60950-1(cULus), EN60825-1
- Compliance Marks CE, cULus, TUV, RCM

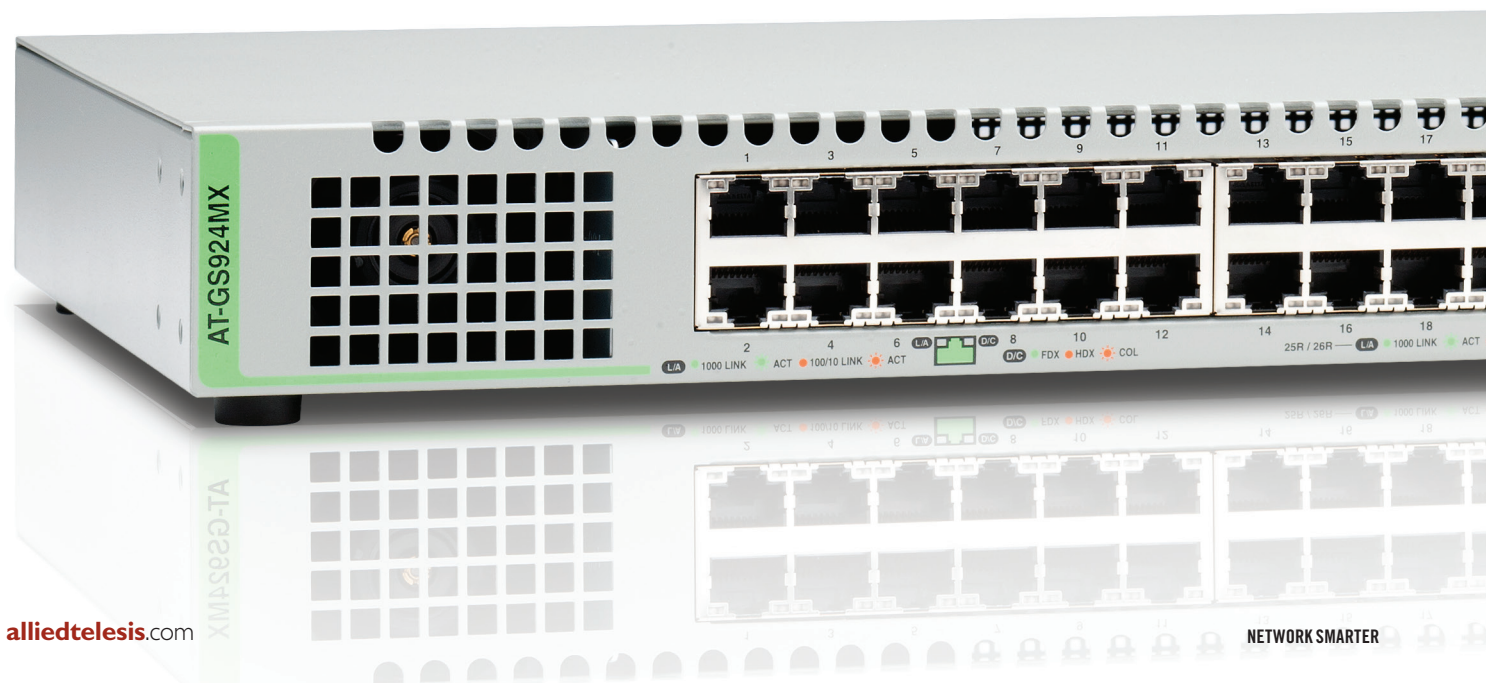

CentreCOM GS900MX/MPX Series | Layer 3 Managed Gigabit Ethernet Stackable Switches



Ordering Information

GS900MX and GS900MPX Series

AT-GS924MX-xx

24-port 10/100/1000T stackable switch with 2 combo ports (10/100/1000T or 100/1000X SFP) and 2 SFP+ stacking/user ports

AT-GS924MPX-xx

24-port 10/100/1000T PoE+ stackable switch with 2 combo ports (10/100/1000T or 100/1000X SFP) and 2 SFP+ stacking/user ports

AT-GS948MX-xx

48-port 10/100/1000T stackable switch with 2 combo ports (10/100/1000T or 100/1000X SFP) and 2 SFP+ stacking/user ports

AT-GS948MPX-xx

48-port 10/100/1000T PoE+ stackable switch with 2 combo ports (10/100/1000T or 100/1000X SFP) and 2 SFP+ stacking/user ports

Where xx = 10 for US power cord
20 for no power cord
30 for UK power cord
40 for Australian power cord
50 for European power cord

1000Mbps SFP Modules

1G SFP speed on 10G port is not supported.

AT-SPTX

1000T 100 m copper

AT-SPSX

1000SX GbE multi-mode 850 nm fiber up to 550 m

AT-SPEX

1000X GbE multi-mode 1310 nm fiber up to 2 km

AT-SPLX10

1000LX GbE single-mode 1310 nm fiber up to 10 km

AT-SPLX10/I

1000LX GbE single-mode 1310 nm fiber up to 10 km industrial temperature

AT-SPBD10-13

1000LX GbE Bi-Di (1310 nm Tx, 1490 nm Rx) fiber up to 10 km

AT-SPBD10-14

1000LX GbE Bi-Di (1490 nm Tx, 1310 nm Rx) fiber up to 10 km

AT-SPLX40

1000LX GbE single-mode 1310 nm fiber up to 40 km

AT-SPZX80

1000ZX GbE single-mode 1550 nm fiber up to 80 km

100Mbps SFP Modules

AT-SPFX/2

100FX multi-mode 1310 nm fiber up to 2 km

AT-SPFX/15

100FX single-mode 1310 nm fiber up to 15 km

AT-SPFXBD-LC-13

100BX Bi-Di (1310 nm Tx, 1550 nm Rx) fiber up to 10 km

AT-SPFXBD-LC-15

100BX Bi-Di (1550 nm Tx, 1310nm Rx) fiber up to 10 km

10GbE SFP+ Modules

AT-SPI0SR

10GSR 850 nm short-haul, 300 m with MMF

AT-SPI0SR/I

10GSR 850 nm short-haul, 300 m with MMF industrial temperature

AT-SPI0LRM

10GLRM 1310 nm short-haul, 220 m with MMF

AT-SPI0LR

10GLR 1310 nm medium-haul, 10 km with SMF

AT-SPI0LR/I

10GLR 1310 nm medium-haul, 10 km with SMF industrial temperature

AT-SPI0LR20/I

10GER 1310 nm long-haul, 20 km with SMF industrial temperature

AT-SPI0ER40/I

10GER 1310 nm long-haul, 40 km with SMF industrial temperature

AT-SPI0ZR80/I

10GER 1550 nm long-haul, 80 km with SMF industrial temperature

AT-SPI0TW1

1 meter SFP+ direct attach cable, can also be used for stacking



Feature Licenses

NAME	DESCRIPTION	INCLUDES
AT-FL-GS9X-UDLD	UniDirectional Link Detection	▶ UDLD