

# UFO Squebble

The Connectix Unseen Fibre Optics (UFO) Squebble (Square Pebble) customer connection solution is a rapid, deployable, spooled fibre solution which facilitates the connection of the customer to the UFO building distribution cabling system and the preferred internet service providers (ISP) network optical network terminal device (ONT).


Each Squebble is pre-fibred with a factory terminated & tested bend-insensitive single mode ITU G.657.B3 assembly; 30 metres long with either SC/APC plug connector and SC/APC bulkhead adaptor interface, or alternatively with LC/APC plug connector at one end to SC/APC adaptor bulkhead interface at the other.

The terminated SC/APC or LC/APC plug is installed through the wall into the UFO Midspan enclosure connecting the customer to the UFO building distribution cabling system. Customer connection to their selected ISP is facilitated via an SC/APC customer connection patch lead mated between the Squebble and the ISP's ONT device.

It's sleek, low-profile aesthetic design is ideally suited for modern, traditional apartment spaces and for use with the wider Connectix UFO portfolio. The Squebble offers installers an efficient and discrete cabling solution.

## Features & Benefits

- Compact square design
- 900µm buffered fibre
- Laser Warning symbol embossed on lid
- Child-proof lid retention mechanism
- White 3mm Single mode bend-insensitive fibre ITU-T.G.657.B3
- 30 metre max. spooled cable length
- Option to mount to surface or single gang backbox
- 3 corner exit points for connection to corridor Midspan Unit
- Supplied with 2 x No4 x 25 mm screws and 2 x Rawl Plugs fixings

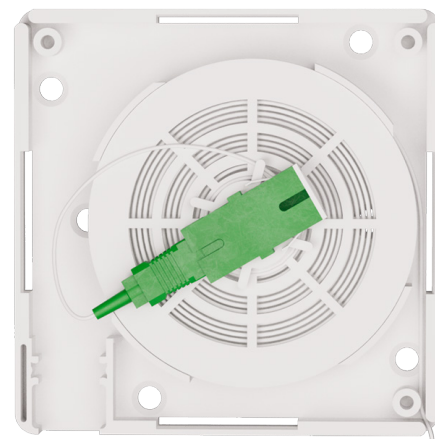

Product Specification	
Material	UV Stabilized UL94V0 ABS (Acrylonitrile Butadiene Styrene)
Material Colour	White
Polish Type	APC
Connector Type	LC/APC, SC/APC
Application	Indoor FTTX, FTTB, MDU, SMDU, SDU, Retrobuild
Fibre Count	1
Fibre Mode	Singlemode (OS2)
Ferrule Material	Zirconia Ceramic
Cable Diameter	900µm
Fibre Type	Bend-Insensitive G.657.B3 (IEC 60793-2-50 B6.B3)
Size (W x H x D)	90mm x 90mm x 22.5mm
Temperature Range	-20 °C to +65°C

Ordering Information	
Product Description	Part Number
Connectix UFO Squebble - 30m 900µm SC/APC - SC/APC Includes 1.0m SC/APC - SC/APC G.657.A1 3mm Singlemode Patch Lead White	UFO-SQU-SC
Connectix UFO Squebble - 30m 900µm SC/APC - LC/APC Includes 1.0m LC/APC - LC/APC G.657.A1 3mm Singlemode Patch Lead White	UFO-SQU-LC