

Cisco 4-Port and 8-Port OC-3c/STM-1 Packet over SONET Shared Port Adapters

The Cisco® I-Flex design combines shared port adapters (SPAs) and SPA interface processors (SIPs), using an extensible design that enables service prioritization for voice, video, and data services. Enterprise and service provider customers can use improved slot economics resulting from modular port adapters are interchangeable across Cisco routing platforms. The I-Flex design maximizes connectivity options and offers superior service intelligence through programmable interface processors, which deliver line-rate performance. I-Flex enhances speed-to-service revenue and provides a rich set of quality-of-service (QoS) features for premium service delivery while effectively reducing the overall cost of ownership. This data sheet contains the specifications for the Cisco 4/8-Port OC-3c/STM-1 Packet over SONET SPAs (Cisco 4/8-Port OC-3 POS SPAs; refer to Figure 1).

Figure 1. Cisco 4-Port and 8-Port OC-3c/STM-1 POS SPAs



PRODUCT OVERVIEW

The Cisco 4- and 8-Port OC-3 POS SPAs are available on high-end Cisco Systems® routing platforms offering the benefits of network scalability with lower initial costs and ease of upgrades. The Cisco SPA/SIP portfolio continues the Cisco focus on investment protection along with consistent feature support, broad interface availability, and the latest technology. The Cisco SPA/SIP portfolio allows deployment of different interfaces (Packet over SONET/SDH [POS], ATM, Ethernet, and so on) on the same interface processor.


The Cisco 4- and 8-Port OC-3 POS SPAs are available with four or eight Small Form-Factor Pluggable (SFP) interfaces. SFP modules are available in multiple optical reaches from 2 to 80 km.

Applications

The Cisco OC-3 POS SPAs can be used in multiple applications (Figure 2), including:

- Access and aggregation
- WAN uplinks
- Internet peering

Figure 2. Cisco 4/8-Port OC-3 POS SPA Applications

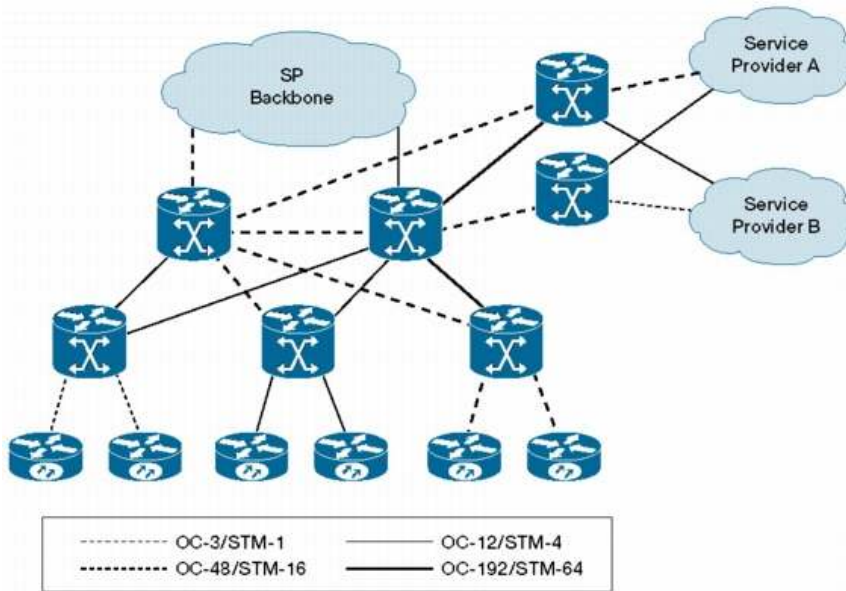

Primary Features and Benefits

The Cisco SPA/SIP portfolio offers many advantages, including:

- Uses modular, flexible, intelligent interface processors:
 - Flexibility, providing mix and match of interface types on the same interface processor for consistent services, independent of access technology.
 - Pioneering programmable interface processors that provide flexibility for the service diversity required in next-generation networks.
 - Innovative design that provides intelligent delivery of services without compromising on performance.
- Increases speed to service revenue:
 - The future-proof programmable Cisco architecture extended to 10 gigabits per second dramatically improves customer density, increasing potential revenue per platform.
 - Interface breadth (copper, channelized, POS, ATM, and Ethernet) on a modular interface processor allows service providers to more quickly roll out new services, helping ensure that all customers large and small receive consistent, secure, and guaranteed services.
 - High-density SFP interfaces are featured for high-port-count applications with reach flexibility. Future optical technology improvements can be adopted using existing SPAs.
- Dramatically improves the financials of your routing purchase:
 - Improved slot economics and increased density reduce capital expenditures (CapEx).
 - The ability to easily add new interfaces as they are needed enables a "pay-as-you-grow" business model while still offering a high-density solution.
 - SPAs are shared across multiple platforms and can be easily moved from one to another, providing consistent feature support, accelerated product delivery, and a significant reduction in operating expenses (OpEx) through common sparing as service needs change.

PRODUCT SPECIFICATIONS

Table 1 gives specifications for the Cisco 4/8-Port OC-3 POS SPA.

Table 1. Product Specifications for the Cisco 4/8-Port OC-3 POS SPA

Features	Descriptions
Product compatibility	<ul style="list-style-type: none"> • Cisco 12000 Routers (4/8-port OC-3c)
Port density per SPA	4 ports 8 ports
Physical interface	<ul style="list-style-type: none"> • OC-3c/STM-1 SFP optics module (refer to optical parameters in Table 2) • Visual status indicators (LEDs): <ul style="list-style-type: none"> - SPA status LED - Per-port LEDs - Carrier and alarm - Active and loopback
Protocols	<ul style="list-style-type: none"> • RFC 1662 PPP in High-Level Data Link Control (HDLC)-like framing • RFC 2615 Point-to-Point Protocol (PPP) over SONET/SDH • RFC 2427, Multiprotocol Interconnect over Frame Relay • IPv4/IPv6
Features and functions	<ul style="list-style-type: none"> • Synchronization <ul style="list-style-type: none"> - Local (internal) or loop timed (recovered from network) - Pointer activity monitoring • Local (diagnostic) and line (network) loopback • Payload mapping <ul style="list-style-type: none"> - POS with 1 + X^M3 self-synchronous scrambler • SONET/SDH compliance <ul style="list-style-type: none"> - Telcordia (Bellcore) GR-253-CORE (as applicable) - ANSI T1.105, T1.231 - ITU-T G.707, G.957, G.825 (as applicable) • Supported SONET/SDH alarm and signal events <ul style="list-style-type: none"> - Signal failure bit error rate (SF-ber) - Signal degrade bit error rate (SD-ber) - Signal label payload construction (C2) - Path trace byte (J1) - Section <ul style="list-style-type: none"> - Loss of signal (LoS) - Loss of frame (LoF) - Error counts for B1 - Threshold crossing alarms (TCA) for B1 - Line <ul style="list-style-type: none"> - Line alarm indication signal (LAIS) - Line remote defect indication (LRDI) - Line remote error indication (LREI) - Error counts for B2 - TCA for B2 - Path <ul style="list-style-type: none"> - Path alarm indication signal (PAIS) - Path remote defect indication (PRDI) - Path remote error indication (PREI) - Error counts for B3 - TCA for B3 - Loss of pointer (LoP) - Positive stuffing event (PSE) - Negative stuffing event (NSE) - Path unequipped indication signal (PUNEQ) - Path payload mismatch indication signal (PPLM)
Network management	<ul style="list-style-type: none"> • RFC 2558 MIB (SONET/SDH) • Simple Network Management Protocol (SNMP)
Reliability and availability	<ul style="list-style-type: none"> • Online insertion and removal (OIR) • Field-replaceable SFP optical modules • 1+1 SONET Automatic Protection Switching (APS) and SDH Linear Multiplexer Section Protection (MSP) protocols • Single SPA software reset

Physical specifications	<ul style="list-style-type: none"> • Weight: 0.75 lb (0.34 kg) • Height: 0.8 in. (2.03 cm) (single height) • Width: 6.75 in. (17.15 cm) • Depth: 7.28 in. (18.49 cm)
Power	<ul style="list-style-type: none"> • 4-Port OC-3c/STM-1 = 6.0W (no optics) • 8-Port OC-3c/STM-1 = 8.0W (no optics)
Environmental specifications	<ul style="list-style-type: none"> • Operating temperature: 41 to 104°F (5 to 40°C) • Storage temperature: -38 to 150°F (-40 to 70°C) • Operating humidity: 5 to 85% relative humidity • Storage humidity: 5 to 95% relative humidity
Compliance and agency approvals	<p>Safety</p> <ul style="list-style-type: none"> • UL 60950 • CSA 22.2-No.60950 • EN60950 • IEC 60950 CB Scheme • ACA TS001 • AS/NZS 3260 • EN60825/IEC60825 laser safety (SR, IR-Class 1) (VSR-Class 1M)1 • 21CFR1040 -FDA Code of Federal Regulations (USA) laser safety (SR, IR-Class 1) (VSR-Class 1M)1 <p>EMC</p> <ul style="list-style-type: none"> • FCC Part 15 (CFR 47) • ICES 003 • EN55022 • CISPR 22 • AS/NZS CISPR22 • VCCI • EN55024 • EN50082-1 • EN61000-6-1 • EN61000-3-2 • EN61000-3-3 <p>Network Equipment Building System (NEBS)</p> <p>This product is designed to meet the following requirements (official qualification may be in progress):</p> <ul style="list-style-type: none"> • SR-3580—NEBS: Criteria levels (Level 3 compliant) • GR-63-Core—NEBS: Physical protection • GR-1089-Core—NEBS: EMC and safety <p>ETSI</p> <ul style="list-style-type: none"> • EN300 386/EN300 386-2 Class B • ETS 300 019 Storage Class 1.1 • ETS 300 019 Transportation Class 2.3 • ETS 300 019 Stationary Use Class 3.1

Table 2 gives optical specifications for the Cisco 4/8-port OC-3 POS SPAs.

Table 2. Optical Specifications for the Cisco 4/8-Port OC-3 POS SPAs

SFP Optics	Maximum Distance
Multimode (MM)	Up to 0.25 mi (500m)
Single-mode (SM)	Up to 1.2 mi (2 km)
SM intermediate reach (IR-1)	Up to 9 mi (15 km)
SM long reach (LR-1)	Up to 25 mi (40 km)
SM extended reach (LR-2)	Up to 50 mi (80 km)

ORDERING INFORMATION

To place an order, visit the Cisco Ordering Homepage or refer to Table 3.

Table 3. Ordering Information

Product Name	Part Number
Cisco 4-Port OC-3c/STM-1 POS SPA	SPA-4XOC3-POS-V2
Cisco 8-Port OC-3c/STM-1 POS SPA	SPA-8XOC3-POS
OC-3/STM-1, OC-3/STM-1 SFP, MM	SFP-OC3-MM
OC-3/STM-1, OC-3/STM-1 SFP, SM, SR	SFP-OC3-SR
OC-3/STM-1, OC-3/STM-1 SFP, SM, IR-1	SFP-OC3-IR1
OC-3/STM-1, OC-3/STM-1 SFP, SM, LR-1	SFP-OC3-LR1
OC-3/STM-1, OC-3/STM-1 SFP, SM, LR-2	SFP-OC3-LR2

SERVICE AND SUPPORT

Cisco offers a wide range of services programs to accelerate customer success. These innovative services programs are delivered through a unique combination of people, processes, tools, and partners, resulting in high levels of customer satisfaction. Cisco services help you to protect your network investment, optimize network operations, and prepare your network for new applications to extend network intelligence and the power of your business. For more information about Cisco services, refer to [Cisco Technical Support Services](#) or [Cisco Advanced Services](#).

FOR MORE INFORMATION

For more information about the Cisco SPA/SIP portfolio, visit <http://www.cisco.com/go/spa> or contact your local Cisco account representative.



Corporate Headquarters
Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 526-4100

European Headquarters
Cisco Systems International BV
Haarlerbergpark
Haarlerbergweg 13-19
1101 CH Amsterdam
The Netherlands
www-europe.cisco.com
Tel: 31 0 20 357 1000
Fax: 31 0 20 357 1100

Americas Headquarters
Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-7660
Fax: 408 527-0883

Asia Pacific Headquarters
Cisco Systems, Inc.
168 Robinson Road
#28-01 Capital Tower
Singapore 068912
www.cisco.com
Tel: +65 6317 7777
Fax: +65 6317 7799

Cisco Systems has more than 200 offices in the following countries and regions. Addresses, phone numbers, and fax numbers are listed on the **Cisco.com Website at www.cisco.com/go/offices.**

Argentina • Australia • Austria • Belgium • Brazil • Bulgaria • Canada • Chile • China PRC • Colombia • Costa Rica • Croatia • Cyprus • Czech Republic
Denmark • Dubai, UAE • Finland • France • Germany • Greece • Hong Kong SAR • Hungary • India • Indonesia • Ireland • Israel • Italy
Japan • Korea • Luxembourg • Malaysia • Mexico • The Netherlands • New Zealand • Norway • Peru • Philippines • Poland • Portugal
Puerto Rico • Romania • Russia • Saudi Arabia • Scotland • Singapore • Slovakia • Slovenia • South Africa • Spain • Sweden
Switzerland • Taiwan • Thailand • Turkey • Ukraine • United Kingdom • United States • Venezuela • Vietnam • Zimbabwe

Copyright © 2006 Cisco Systems, Inc. All rights reserved. CCSP, CCVP, the Cisco Square Bridge logo, Follow Me Browsing, and StackWise are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn, and iQuick Study are service marks of Cisco Systems, Inc.; and Access Registrar, Aironet, BPX, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, FormShare, GigaStack, HomeLink, Internet Quotient, IOS, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, LightStream, Linksys, MeetingPlace, MGX, the Networkers logo, Networking Academy, Network Registrar, Packet, PIX, Post-Routing, Pre-Routing, ProConnect, RateMUX, ScriptShare, SlideCast, SMARTnet, The Fastest Way to Increase Your Internet Quotient, and TransPath are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0601R)