

Connectix Cabling Systems

Cable Slack Holder



Connectix Cable Slack Holders are designed to hold optical fibre cables in two different sections, using an internal drop cable pathway and an outer external for backbone and networking cables. Manufactured from plastic injection moulded ASA material, the Connectix Cable Slack Holder maintains the minimum bending radius of the cables, prevents macro and micro bending on the fibres and allows consistency and regularity in the fibre loops. UV and weather resistant, they can be installed internally or externally and engineering assembly is quick and easy without the need of tools, screws or nuts. An optional connection box can be installed providing splice options to 168-fibre or connectorising to 96-fibre.

Features and Benefits

- Able to hold a fibre optic cable in two different locations (network cable + drop customer cable)
- Produced in non-conductive material
- Weather resistant
- UV resistant
- Light material that allows easy installation
- Easy storage, transportation and assembly

Product Specifications	
Material	Acrylonitrile Styrene Acrylate (ASA)
Weight	0.78Kg
Colour	Black
External Dimensions	392 x 419.5 x 67mm

Ordering Information	
Product Description	Part Number
Connectix Cable Slack Holder	009-001-007-40

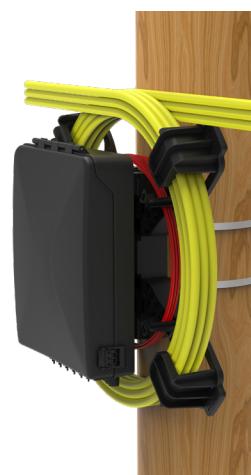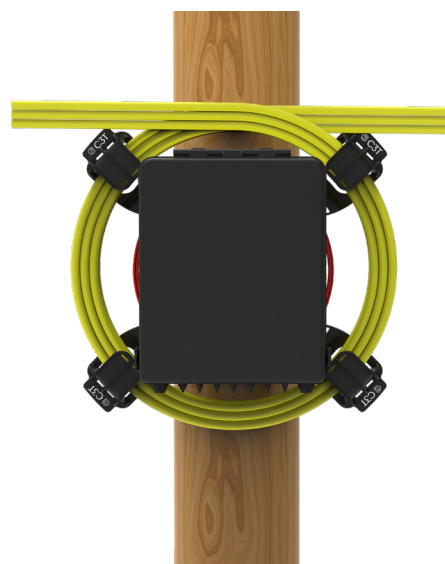

Connectix Cabling Systems

Cable Slack Holder

The Connectix Cable Slack Holder is composed of symmetric pieces that fit each other, making it easy to transport, to store and to assemble.

- It is made of ASA (Acrylonitrile Styrene Acrylate) plastic material, that is non-conductive and UV resistant;
- It's design makes it a robust piece that gives strength whilst remaining lightweight at the same time. The Cable Slack Holder is designed to minimize wind span.




Network Fibre Optic Cable:

It can hold up to 12 meters (3 cables in 3 loops each) of fibre optic cable with a diameter of 12mm.

Customer Drop Fibre Optic Cable:

It can hold up to 10 meters (1 cable with 12 loops) of fibre optic cable with a diameter of 3.5mm.

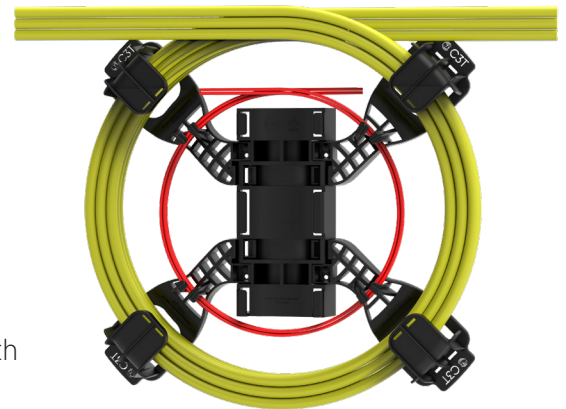

Connectix Cabling Systems

Cable Slack Holder

Cable Slack Holder's Features

Plug & Play

Very easy to assemble, the Cable Slack Holder is assembled without tools, screws and nuts. The arms are assembled in the main structure and held with a stainless-steel band.

If required, the arm does have a position to assemble an M4 type screw with a nut.


One product - two slacks

The arms have two fixings points.

The external one holds the loop for the network fibre optic cable and the internal one holds the loop for the drop customer fibre optic cable.

The Cable Slack Holder is designed to support not only the slack of cable, but also the following termination equipment.

- Customer connection point up to 96 Fibres
- Network splice closure up to 168 Fibres

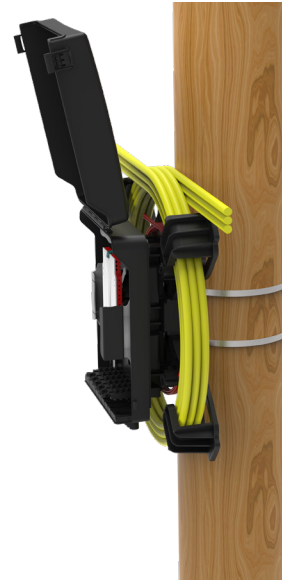

Dimensions

